

Cargo 1300

80x120 INSIDE



ATP




Isothermal container for the transport of chilled and frozen products at a controlled temperature

- Suitable for supermarket chains, logistics operators, chilled or frozen food distributors and manufacturers, carriers.
- Europallet **internal dimensions**: maximum convenience in loading and unloading of goods on pallets.
- 1,300 litres of capacity.
- Total compliance with the cold chain at all stages of transport.
- Speeds up distribution operations at the point of sales: it can be loaded inside the cold room of the wholesale centre and unloaded at the refrigerated counter of the destination supermarket.
- It can be transported using conventional vehicles: it allows to simultaneously transport chilled, frozen and ambient temperature products using a single non-insulated vehicle.
- Manufactured using the rotational moulding technology: mono-block container and door (free of sharp edges, joints and welds).
- Fully recyclable at the end of the operating life.


MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and the door; suitable for food contact	Polyurethane	insulating material between the walls of the container and the door; free of CFC and HCFC
Silicone	seal	Polypropylene	hinges
Galvanised steel	metal feet, locking handle, locking rods, door angular reinforcement, handling handles, hinged rods, plates connecting rods hinged		

TECHNICAL CHARACTERISTICS

	<p>Equipped with 6 feet of galvanized steel h 120 mm.</p>		<p>Europallet drip tray (on request)</p>
	<p>Label holder for the identification of the content or destination (on request).</p>		<p>Door opens up to 270° with door retaining catch.</p>
	<p>Sealing gasket of the door easily removable.</p>		<p>Dual pivot hinge system. Better stability of the door over time.</p>
	<p>Ergonomic handle made of galvanized steel.</p>		<p>Handle prepared for the use of tamper-proof system.</p>
	<p>Chilled and frozen eutectic plates, to increase temperature retention performance over time (on request).</p>		<p>Internal temperature can be checked through a thermometer installed in the door (on request).</p>
	<p>Available (on request) USB data logger to record temperature data during transport.</p>		<p>Internal grooves improving good air circulation.</p>
	<p>Mono-block structure, no sharp edges, joints and welds.</p>		<p>Insulated with CFC and HCFC-free polyurethane foam.</p>
<p>°C</p>	<p>Guaranteed for use: from -30° to +100°C</p>	<p>K</p>	<p>Overall heat transmission coefficient: K = 0.34 W/ m²K</p>

TECHNICAL SPECIFICATIONS

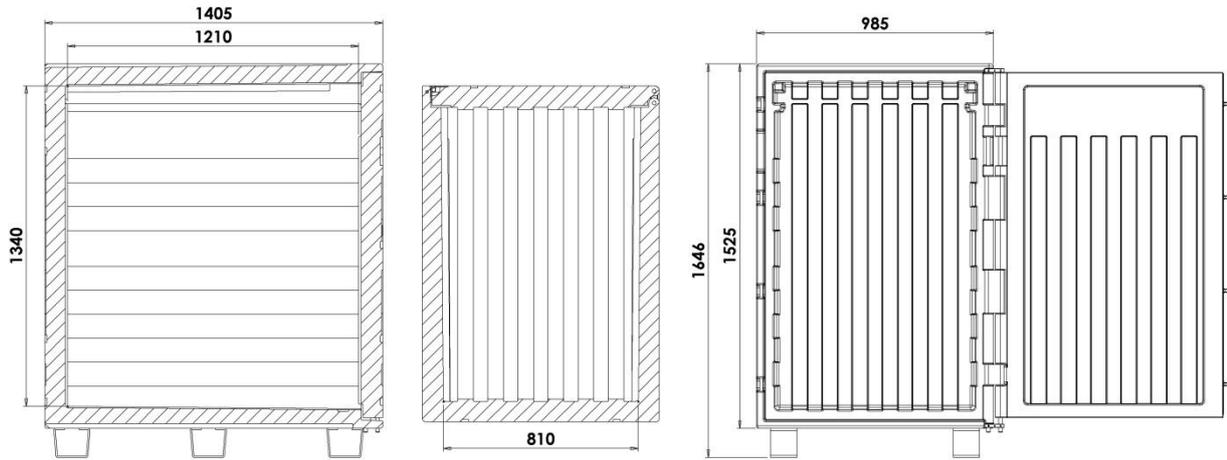

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity l	Weight Kg
Cargo 1300	13000003	melange grey blue	985x1405xh1646	810x1210xh1340	1350	153
Label holder in aluminium	AME101	aluminium	155x211xh6			
Pallet Drip-tray	ANA00101	blue	800X1200			
Eutectic plate Chilled +3°C - 3 x Cargo -	PE110001	pink	835x353xh45			7.6
Eutectic plate Frozen - 21°C - 3 x Cargo -	PE110002	blue	835x353xh45			7.6
Data logger USB	AFG002		80x33xh14			
Certificate of ATP approval IR class	AOA007/C					
Certificate of ATP approval RRCX class	AOB007/C					

