



Chest type isothermal container for the transport of chilled and frozen products at a controlled temperature

- Suitable for supermarket chains, logistics operators, chilled or frozen food distributors and manufacturers, carriers.
- Convenient opening, useful to optimise the load capacity.
- Suitable for the transport of bulk goods.
- 370 litres of capacity.
- Total compliance with the cold chain at all stages of transport.
- Speeds up distribution operations at the point of sales: it can be loaded inside the cold room of the wholesale centre and unloaded at the refrigerated counter of the destination supermarket.
- It can be transported using conventional vehicles: it allows to simultaneously transport chilled, frozen and ambient temperature products using a single non-insulated vehicle.
- Manufactured using the rotational moulding technology: mono-block container and door (free of sharp edges, joints and welds).
- Fully recyclable at the end of the operating life.


MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and the door; suitable for food contact	Polyurethane	insulating material between the walls of the container and the door, free of CFC and HCFC
Silicone	seal	Nylon	runners
Polypropylene	hinges, pallets	Stainless steel	handling handles, closing handle, inner rod of the door
Galvanised steel	hinge rods, connecting rods hinged plates, runner support, side covers Shock protection		

TECHNICAL CHARACTERISTICS

	<p>Polypropylene pallet in size: 1200x800xh145mm</p>		<p>Stainless steel locking handle with release button and anti-tamper system.</p>
	<p>Door equipped with two gas shock protection, to facilitate opening.</p>		<p>Stainless steel rod with 2 hooks integrated inside the door.</p>
	<p>Model for dry ice transport available.</p>		<p>Chilled and frozen eutectic plates, to increase temperature retention performance over time (on request).</p>
	<p>Internal temperature can be checked through a thermometer installed in the door (on request).</p>		<p>Available (on request) USB data logger to record temperature data during transport.</p>
	<p>Label holder (on request) for the identification of the content or destination. Suitable for A5 format documents.</p>		<p>Internal grooves improving good air circulation.</p>
	<p>Easily removable door seal.</p>		<p>Hole with expansion plug for the drainage of liquid placed on the bottom of the container.</p>
	<p>Dual pivot hinge system. Better stability of the door over time.</p>		<p>Mono-block structure, no sharp edges, joints and welds. Insulated with CFC and HCFC-free polyurethane foam.</p>
<p>K</p>	<p>Overall heat transmission coefficient: K = 0.29 W/m²K</p>	<p>°C</p>	<p>Guaranteed for use: from -30° to +100° C.</p>

TECHNICAL SPECIFICATIONS

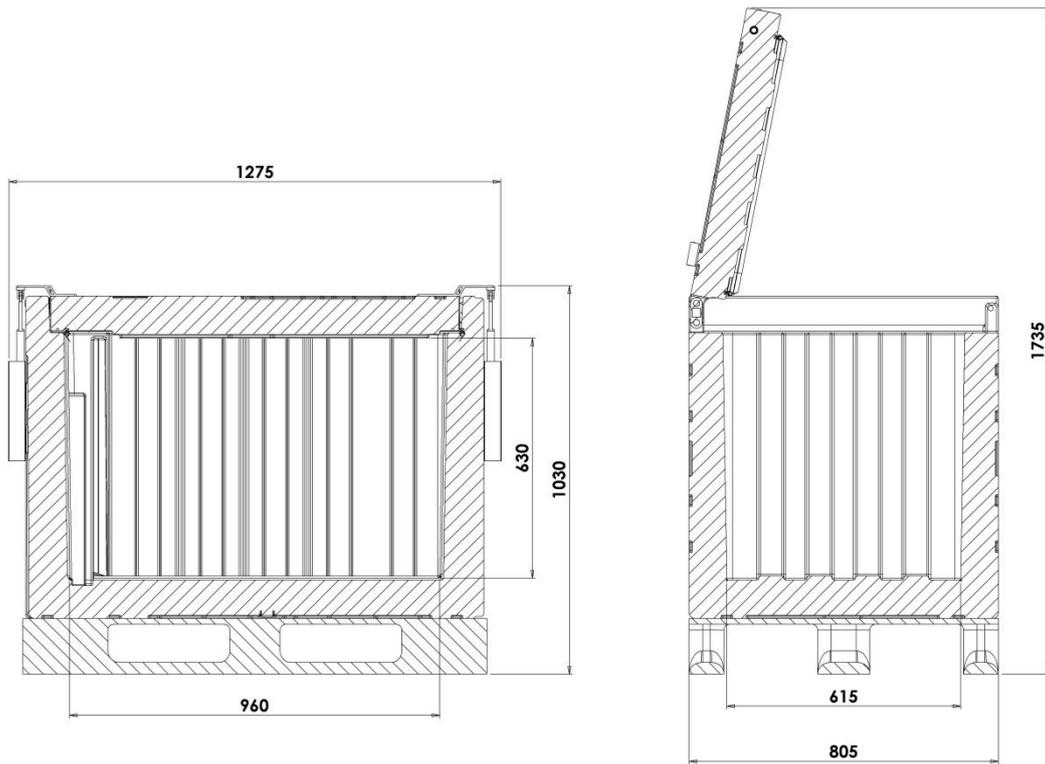

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity l	Weight Kg
Cargo 370V with pallet	03700007	melange grey blue	1275x805xh1030	960X615Xh630	370	80
Cargo 370V with pallet, for dry ice transport	03709017	melange grey blue	1275x805xh1030	960X615Xh630	370	80
Label holder	AMC101	transparent	173xh200	148xh210 -A5-		
Eutectic plate Chilled +3°C - 2 x Cargo -	PE500001	pink	540x325xh57			6.8
Eutectic plate Frozen - 21°C - 2 x Cargo -	PE500002	blue	540x325xh57			6.8
Data logger USB	AFG002		80x33xh14			
Certificate of ATP approval IR class	AOA008/C					
Certificate of ATP approval RRCX class	AOB008/C					