

Koala 70 P



GN 1/1

8 RUNNERS





Refrigerated container for the transport of chilled products at a controlled temperature

- Temperature adjustment range: **from 0°C to +10°C.**
- Equipped with 8 constant pitch runners of 4 cm. It allows to transport different combinations of GN 1/1 pans and submultiples.
- Suitable for supermarket chains, logistics operators, chilled food distributors and manufacturers, carriers.
- 68 litres of capacity.
- Total compliance with the cold chain at all stages of transport.
- It can be transported using conventional vehicles: it allows to simultaneously transport chilled, frozen and ambient temperature products using a single non-insulated vehicle.
- Equipped with a low consumption cooling unit.
- Dual power source: during transport can be connected to the battery (or auxiliary battery) of the vehicle and, at the destination, can be connected to mains power.
- Manufactured using the rotational moulding technology: mono-block container and door (free of sharp edges, joints and welds).
- Fully recyclable at the end of the operating life.

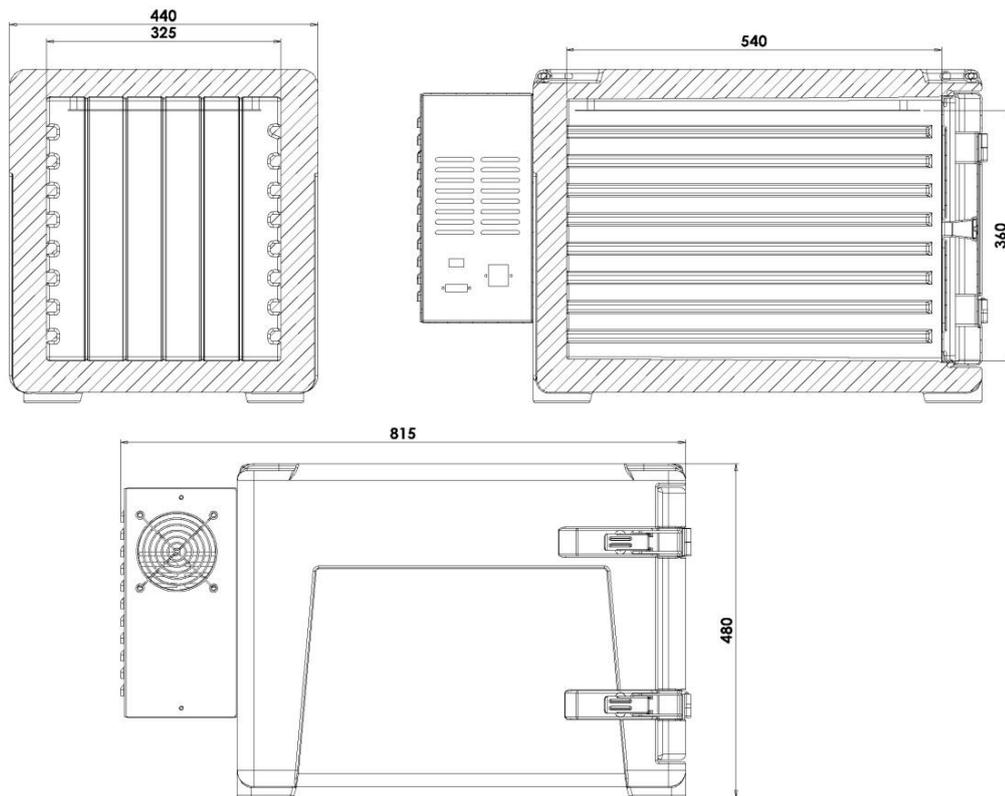
MANUFACTURING MATERIALS

| | | | |
|-------------------------|--|--|---|
| Polyethylene | inner and outer walls of the container and the door; suitable for food contact | Polyurethane | insulating material between the walls of the container and the door; free of CFC and HCFC |
| Silicone | gasket | Fiberglass reinforced polyamide | hinges |
| Galvanised steel | cooling unit frame | Stainless steel | latches, grip handles |
| POM acetal resin | grip handle covers | | |

TECHNICAL CHARACTERISTICS

| | | | |
|---|---|--|---|
| <p>0°/+10°C</p> | <p>Temperature adjustment range:</p> <ul style="list-style-type: none"> • from 0°C to +10°C. | <p>+/- 0,5 °C</p> | <p>Degree of accuracy in temperature adjustment:</p> <ul style="list-style-type: none"> • +/-0,5°C. |
|  | <p>Equipped with two cables:</p> <ul style="list-style-type: none"> • one for power supply to 230Vac 50-60Hz; |  | <ul style="list-style-type: none"> • the other for feeding to 12/24Vdc (with cigarette lighter socket.) |
|  | <p>Power input:</p> <ul style="list-style-type: none"> • 0,35A to 230Vac; • 3,5A to 24V dc; • 7A to 12V dc. |  | <p>Protection against excessive vehicle battery voltage drop, should the battery voltage drop below 11V.</p> |
|  | <p>Fuses:</p> <ul style="list-style-type: none"> • 4A for 230Vac; • 15A for 12/24V dc. | <p>GAS</p> | <p>Coolant gas:</p> <ul style="list-style-type: none"> • R134a |
|  | <p>Cooling unit performance guaranteed for use at ambient temperature:</p> <ul style="list-style-type: none"> • from +10°C to +30°C. |  | <p>Container (insulated case) guaranteed for use:</p> <ul style="list-style-type: none"> • from -30° to +100°C. |
|  | <p>Adjustment and control of the temperature with programmable digital thermostat.</p> |  | <p>Available (on request) USB data logger to record temperature data during transport.</p> |
|  | <p>Fitted with 8 constant pitch runners of 4 cm. It allows to transport:</p> <ul style="list-style-type: none"> • 4GN11 H65; • 2GN11 H150; • 1GN11 H65+2GN11 H100; • 1GN11 H100+1GN11 H200. |  | <p>Fitted with an easily removable door that opens up to 240°, facilitating washing in the dishwasher.</p> |
|  | <p>Easily removable door gasket.</p> |  | <p>Stainless steel grip handles with handle cover.</p> |
|  | <p>Stainless steel latches.</p> |  | <p>Equipped with shockproof hinges, with high resistance to stresses.</p> |
|  | <p>Fitted with adjustable venting valve.</p> |  | <p>Stainless steel GN1/1 grid (AEA020) available upon request.</p> |
|  | <p>Maxidolly trolley:</p> <ul style="list-style-type: none"> • loading capacity 150 Kg; • 4 castors made of anti tracking rubber and PP; • castors dia.: 100 mm; • 2 fixed castors; • 2 swivelling castors. <p>Available with chrome or ss handle.</p> | | <p>Hermetic compressor with electronic control unit for adjustment and control equipped with protection for over-voltages.</p> |
|  | <p>Mono-block structure, no sharp edges, joints and welds.</p> |  | <p>Insulated with CFC and HCFC-free polyurethane foam.</p> |

TECHNICAL SPECIFICATIONS



| Model | Code | Colour | External dim. (mm) | Internal dim. (mm) | Capacity l | Weight Kg |
|---|----------|----------------------|--------------------|--------------------|------------|-----------|
| Koala 70 P cooling unit on back, static | AF089001 | grey/blue melange | 440x815xh480 | 325x540xh360 | 68 | 24 |
| Grid GN 1/1 in stainless steel | AEA020 | stainless steel | 530x325xh12 | | | 1,3 |
| Maxidolly trolley chrome handle | MAXI0012 | grey/blue melange | 525x750xh965 | | | 9,4 |
| Maxidolly trolley stainless steel handle | MAXI0011 | grey/blue melange | 525x750xh965 | | | 9,4 |
| USB Data logger | AFG002 | | 80x33xh14 | | | |