





Chest type refrigerated container for the transport of chilled products at a controlled temperature

- Temperature adjustment range: **from 0°C to +10°C.**
- Suitable for supermarket chains, logistics operators, chilled food distributors and manufacturers, carriers.
- Equipped with a practical top hinged lid, it allows taking full advantage of the load capacity.
- Ideal for transporting bulk produce.
- 370 liters of capacity.
- Total compliance with the cold chain at all stages of transport.
- Speeds up distribution operations at the point of sales: it can be loaded inside the cold room of the wholesale center and unloaded at the refrigerated counter of the destination supermarket.
- It can be transported using conventional vehicles: it allows to simultaneously transport chilled and ambient temperature products using a single non-insulated vehicle.
- Equipped with a low consumption fridge unit.
- Dual power source: during transport can be connected to the battery (or auxiliary battery) of the vehicle and, at the destination, can be connected to mains power.
- Manufactured using the rotational moulding technology: mono-block container and door (free of sharp edges, joints and welds).
- Fully recyclable at the end of the operating life.

MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and the lid; suitable for food contact	Polyurethane	insulating material between the walls of the container and the lid; free of CFC and HCFC
Silicone	gasket	Polypropylene	hinges, pallet
Stainless steel	handling handles, locking handle, inner rod of the door	Galvanized steel	hinge rods, connecting rods hinged plates, gas spring side protective cover, cooling unit frame

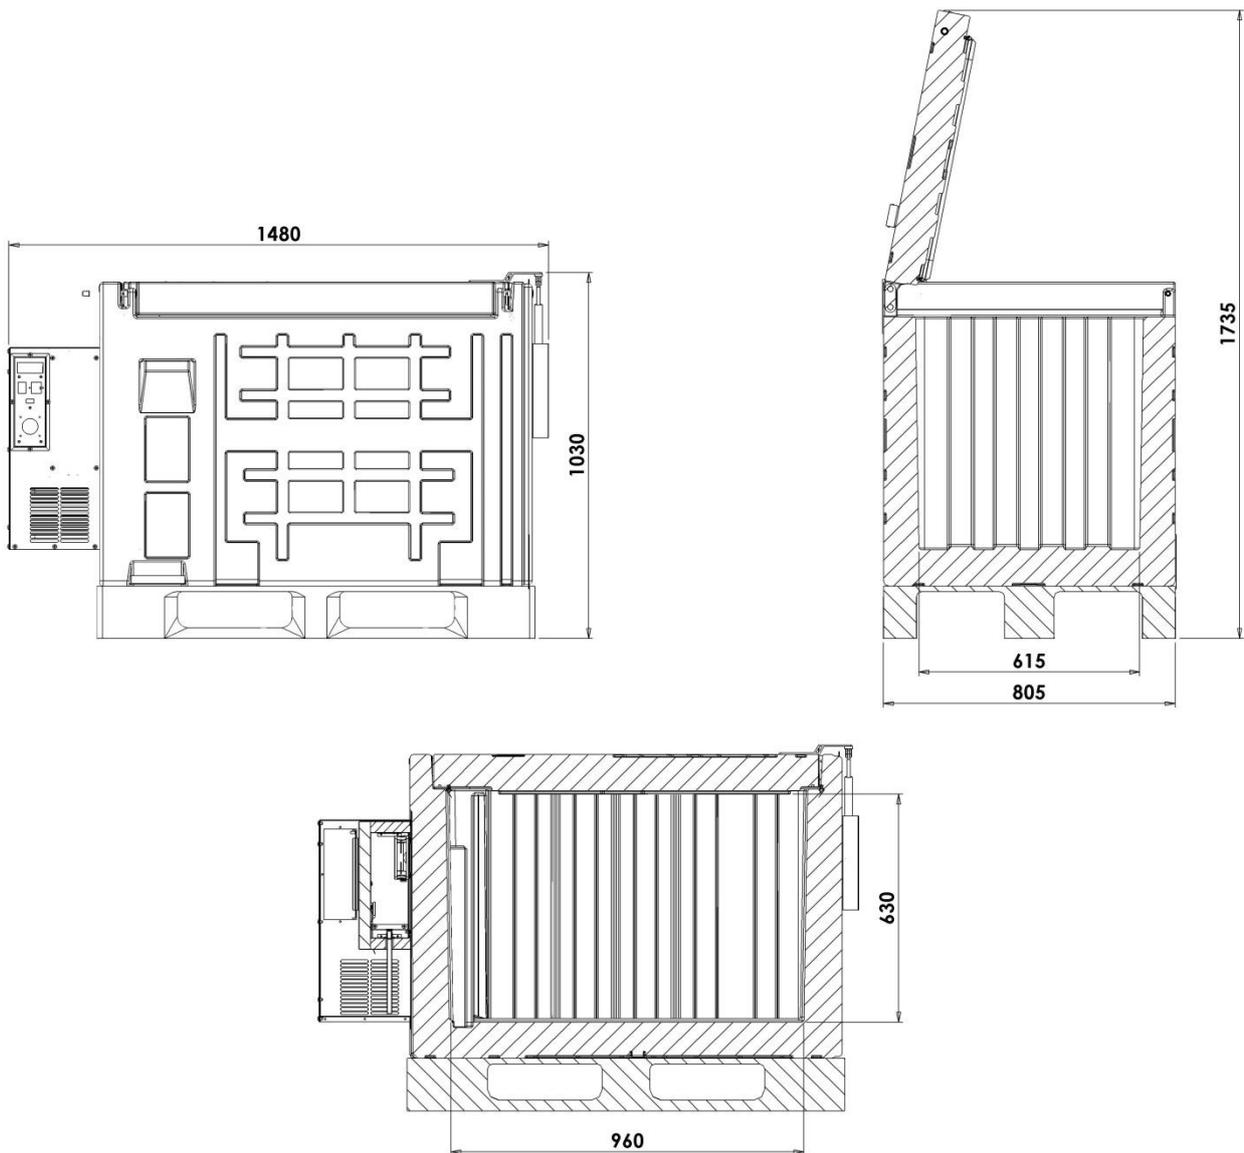
TECHNICAL CHARACTERISTICS

<p>0/+10°C</p>	<p>Temperature adjustment range:</p> <ul style="list-style-type: none"> • from 0°C to +10°C. 	<p>+/- 0.5 °C</p>	<p>Degree of accuracy in temperature adjustment:</p> <ul style="list-style-type: none"> • +/-0.5°C.
	<p>Equipped with two cables:</p> <ul style="list-style-type: none"> • one for power supply to 230Vac 50-60Hz; 		<ul style="list-style-type: none"> • the other with fork terminals for connection to a vehicle battery at 12Vdc or to a possible addition battery.
	<p>Power input:</p> <ul style="list-style-type: none"> • 0,6 A to 230Vac; • 10A to 12Vdc. 		<p>Protection against excessive vehicle battery voltage drop, should the battery voltage drop below 11V.</p>
	<p>Fuses:</p> <ul style="list-style-type: none"> • 4A for 230Vac; • 35A for 12Vdc. 	<p>GAS</p>	<p>Cooling gas</p> <ul style="list-style-type: none"> • R134a 200g
	<p>Cooling unit performance guaranteed for use at ambient temperature:</p> <ul style="list-style-type: none"> • from +10°C to +30°C. 		<p>Container (insulated case) guaranteed for use:</p> <ul style="list-style-type: none"> • from -30° to +100°C.
	<p>Adjustment and control of the temperature with programmable digital thermostat.</p>		<p>Available (on request) USB data logger to record temperature data during transport.</p>
	<p>Pallet in polypropylene with dimensions: 1200x800xh145mm</p>		<p>Lid fitted with a gas spring for easy opening.</p>

TECHNICAL CHARACTERISTICS

	<p>Stainless steel locking handle with release button.</p>		<p>Stainless steel rod with 2 hooks integrated inside the lid.</p>
	<p>Label holder (on request) for easy identification of the content or routing. Suitable for A5 format documents</p>		<p>Internal grooves improving good air circulation.</p>
	<p>Easily removable door seal.</p>		<p>Hole with expansion plug for the drainage of liquid placed on the bottom of the container.</p>
	<p>Dual pivot hinge system. Better stability of the lid over time.</p>		<p>Mono-block structure, no sharp edges, joints and welds.</p>
	<p>Insulated with CFC and HCFC-free polyurethane foam.</p>	<p>K</p>	<p>Overall heat transmission coefficient: K=0,34 W/m²K</p>

TECHNICAL SPECIFICATIONS



Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity l	Weight Kg
Koala 370 PV with pallet, cooling unit on side, ventilated	03709022	grey/blue melange	1480x805xh1030	960x615xh630	370	110
Label holder	AMC101	transparent	173xh200	148xh210 -A5-		
USB Data logger	AFG002		80x33xh14			
Certificate of ATP approval FRAX class	AOD009/C					



Via Savigliano 34 - 12030 Monasterolo di Savigliano (CN)
 Tel. +39 0172812600 - Fax +39 017285991 - info@melform.com
 GPS: Lat 44.681363 - Long 7.624809
www.melform.com

Koala370PV_Refrigerated_Box_Rev0_Gb