

Koala 1000 AF





Refrigerated container for the transport of chilled and frozen products at a controlled temperature

- Available in versions:
 - AF: temperature adjustment range: from -18°C to +10°C;
 - AFH: with heating kit and temperature adjustment range: from -18°C e +40°.
- Insulation offered by container walls ensures that the temperature maintenance is guaranteed with a minimum number of ignitions of the cooling unit; this contributes limiting energy consumption.
- Cooling unit is triggered when external temperature is higher than the temperature set with the programmable digital thermostat. This allows to maintain a constant temperature even in case of very high external temperatures.
- In the AFH versions, the heating unit is triggered when external temperature is lower than the temperature set with the programmable digital thermostat. This allows to maintain a constant temperature even in case of very low external temperatures.
- Total compliance with the cold chain at all stages of transport.
- It can be transported using conventional vehicles: it allows to simultaneously transport chilled, frozen and ambient temperature products using a single non-insulated vehicle.
- Equipped with a low consumption fridge unit.
- It can be powered at 230Vac, using normal mains power or it can be connected to the battery (or auxiliary battery) of the vehicle by inverter.
- Manufactured using the rotational moulding technology: mono-block container and door (free of sharp edges, joints and welds).
- Fully recyclable at the end of the operating life.


MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and lid; suitable for food contact	Polyurethane	insulating material between the walls of the container and of the lid; free of CFC and HCFC
Silicone	gasket	Rubber and polyamide	castors (rubber tread and polyamide core)
Galvanized steel	cooling unit frame, hinge rods, plates connecting rods hinge, castors support	Stainless steel	handling handles, locking handle, inner rod of the door, hinge rod
Polypropylene	hinges		

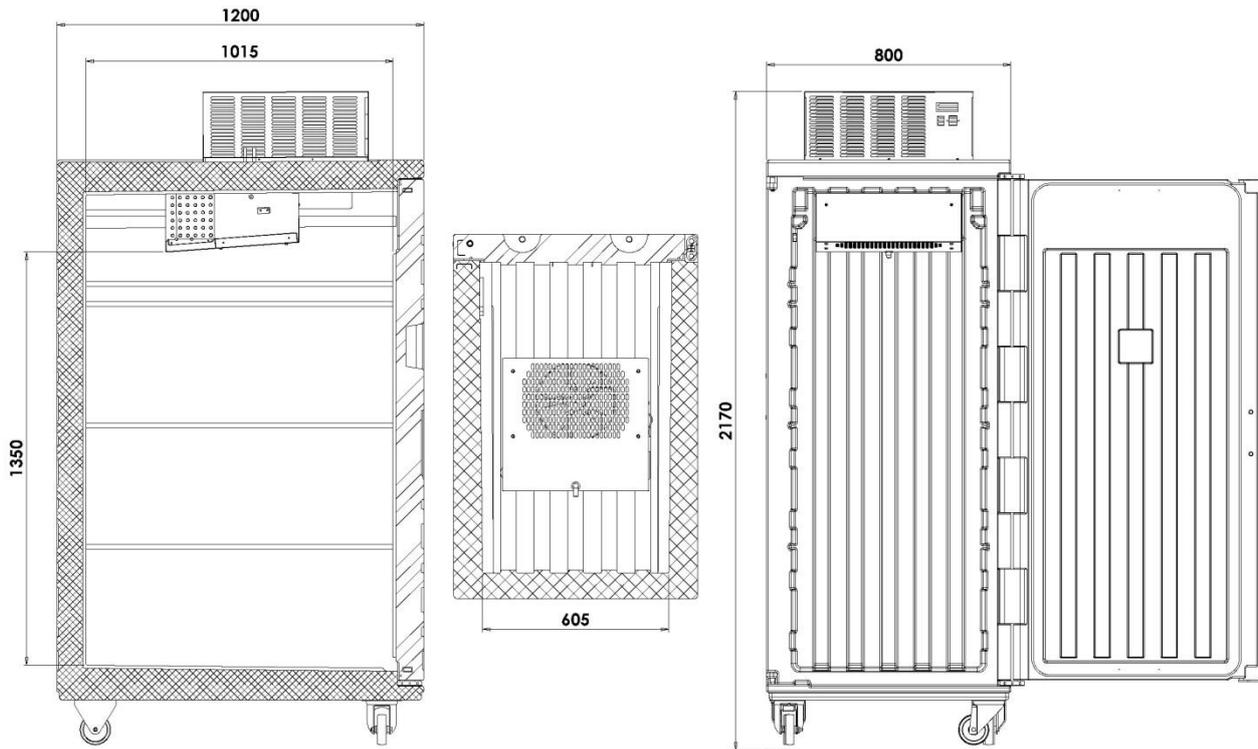
TECHNICAL CHARACTERISTICS

<p>AF Version</p>	<ul style="list-style-type: none"> • from 0°C to +10°C • from -18°C to +10°C 	<p>AFH Version</p>	<ul style="list-style-type: none"> • from 0°C to +40°C • from -18°C to +40°C
<p>+/- 0,5 °C</p>	<p>Degree of accuracy in temperature adjustment:</p> <ul style="list-style-type: none"> • +/-0,5 °C. 		<p>Protection against voltage drops of the vehicle battery, in case of falling below of the limit value of:</p> <ul style="list-style-type: none"> • 11V with power supply 12 Vdc • 22V with power supply 24 Vdc
	<p>Equipped with a cable for power supply to 230Vac 50Hz.</p>		<p>Available (on request) 2 inverter models for connection to the battery (or auxiliary battery) of the vehicle:</p> <ul style="list-style-type: none"> • inverter 12Vdc / 230Vac • inverter 24Vdc / 230Vac
	<p>Cooling unit performance guaranteed for use at ambient temperature:</p> <ul style="list-style-type: none"> • from +10°C to +30°C. 		<p>Container (insulated case) guaranteed for use:</p> <ul style="list-style-type: none"> • from -30° to +100°C.
<p>GAS</p>	<p>Coolant gas:</p> <ul style="list-style-type: none"> • R507 365g 		<p>Hermetic compressor with electronic control unit for adjustment and control equipped with overvoltage protections.</p>
	<p>The ventilation system ensures a greater speed and uniformity of diffusion of the cold inside the container.</p>		<p>Adjustment and control of the temperature with programmable digital thermostat.</p>
	<p>USB data logger available (on request) to record temperature data during transport.</p>		<p>4 seats for housing of the grids positioned to 385/785/1185/1250mm from the bottom of the container. Grids available on request.</p>

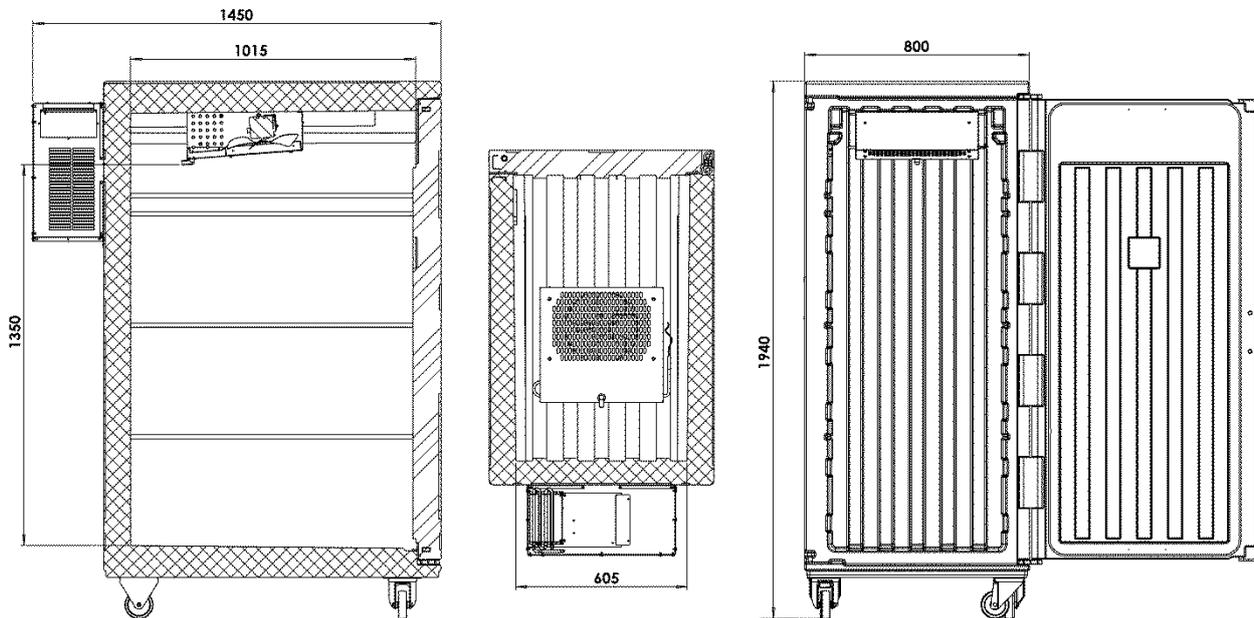
TECHNICAL CHARACTERISTICS

	<p>Stainless steel locking handle with release button; it is prepared for the use of tamper-proof system.</p>		<p>Mono-block structure, no sharp edges, joints and welds.</p>
	<p>Equipped with 4 rubber coated castors of 125 mm (2 fixed and 2 swivel of which one equipped with brake). Support runners plate integrated in the container.</p>		<p>Possibility to insert:</p> <ul style="list-style-type: none"> - Pallets with galvanized steel frame 6 feet h 120 mm - 4 feet h 120mm in galvanized steel.
	<p>Label holder (on request) for the identification of the content or destination. Suitable for A5 format documents.</p>		<p>Double-pivot hinge system. Better door stability over time.</p>
	<p>Door opens up to 270° with door retaining catch.</p>		<p>Easily removable door seal.</p>
	<p>Stainless steel rod with 2 hooks integrated inside the door.</p>		<p>Internal grooves improving good air circulation.</p>
	<p>Insulated with CFC and HCFC-free polyurethane foam.</p>		

TECHNICAL SPECIFICATIONS



Model with cooling unit on top ventilated
code: 10009045EU, 10009005EU, 10009038EU, 10009046EU



Model with cooling unit on back ventilated
code: 10009047EU, 10009048EU, 10009035EU, 10009049EU

Model	Code	12V Power supply Fork terminal	12V Power supply Cigarette lighter socket	Nominal absorption	Fuses	
AF VERSION						
Koala 1000 AF cooling unit on top ventilated from 0°C to +10°C	10009045EU			2A to 230Vac	4A for 230Vac	
Koala 1000 AF cooling unit on back ventilated from 0°C to +10°C	10009047EU			2A to 230Vac	4A for 230Vac	
Koala 1000 AF cooling unit on top ventilated from -18°C to +10°C	10009005EU			2A to 230Vac	4A for 230Vac	
Koala 1000 AF cooling unit on back ventilated from -18°C to +10°C	10009048EU			2A to 230Vac	4A for 230Vac	
AFH VERSION (with heating kit)						
Koala 1000 AFH cooling unit on top ventilated from 0°C to +40°C	10009038EU			2A to 230Vac	4A for 230Vac	
Koala 1000 AFH cooling unit on back ventilated from 0°C to +40°C	10009035EU			2A to 230Vac	4A for 230Vac	
Koala 1000 AFH cooling unit on top ventilated from -18°C to +40°C	10009046EU			2A to 230Vac	4A for 230Vac	
Koala 1000 AFH cooling unit on back ventilated from -18°C to +40°C	10009049EU			2A to 230Vac	4A for 230Vac	
Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity l	Weight Kg
Koala 1000 cooling unit on top ventilated		melange grey blue	800X1200Xh2170	605x1015xh1350	830	164
Koala 1000 cooling unit on back ventilated		melange grey blue	800X1450Xh1940	605x1015xh1350	830	164
ACCESSORIES						
Label holder	AMC101	trasparent	173xh200	148xh210 -A5-		
Grid in stainless steel	AEA023	stainless steel	647x990xh16			5
Folding grid in stainless steel	AEA029	inox	657x990xh30			5
Inverter 12Vdc/220Vac	AHD008					
Inverter 24Vdc/220Vac	AHD011					

